



MAXIMAG LIFTING MAGNETS

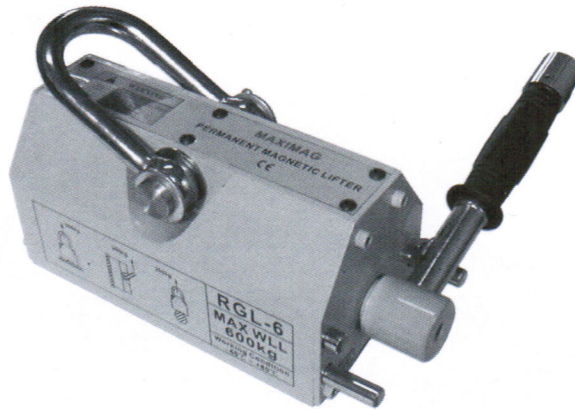


Model	RGL-1	RGL-3	RGL-6	RGL-10	RGL-20	RGL-30
Rated WLL holding force (KgF) (Diag. 1)	100	300	600	1 000	2 000	3 000
Cylindrical lifting capacity (KgF) (Diag. 2)	30	100	200	300	600	N/A
Maximum break away force (KgF)	350	1 050	2 100	3 500	7 000	10 500
Net weight (Kg)	3	10	24	50	125	220
Max handle turning force (KgF)	<4	<8	<8	<16	<16	<20
Length (mm)	92	162	232	258	378	458
Width (mm)	62	92	122	176	234	286
Height (mm)	67	91	117	163	212	261

Diag. 1



Diag. 2



— 3,5 : 1 SAFETY FACTOR —

— SIMPLE LOCKING SWITCH ENABLES ONE-HANDED OPERATION —

— V-SLOT IN LIFTING FACE ALLOWS FOR LIFTING OF FLAT AND ROUNDED SURFACES —

IT IS IMPERATIVE TO DETERMINE THE SUITABILITY OF A MAGNET FOR THE TASK TO BE PERFORMED. MATERIAL THICKNESS AND TYPE INFLUENCE THE WLL.
PLEASE CONSULT YOUR DISTRIBUTOR BEFORE PURCHASE.