


THRUST BEARING SWIVELS



EYE AND EYE



EYE AND JAW

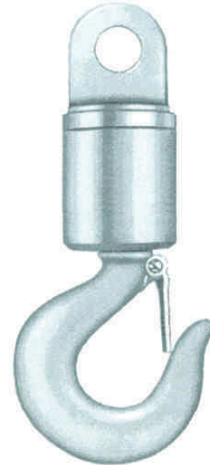

HOOK AND EYE

| Type | Safe working load kg | Total length mm | Outside body dia mm | Eye dia mm | Pin dia mm | Jaw Opening mm |
|------|----------------------|-----------------|---------------------|------------|------------|----------------|
| E-E | 3 000 | 270 | 77 | 20 | - | - |
| H-E | 3 000 | 325 | 77 | 20 | - | - |
| E-J | 3 000 | 280 | 77 | 20 | 20 | 22 |
| E-E | 5 000 | 275 | 95 | 32 | - | - |
| H-E | 5 000 | 380 | 95 | 32 | - | - |
| E-J | 5 000 | 300 | 95 | 32 | 23 | 27 |
| E-E | 7 500 | 315 | 100 | 35 | - | - |
| H-E | 7 500 | 440 | 100 | 35 | - | - |
| E-J | 7 500 | 335 | 100 | 35 | 30 | 36 |
| E-E | 10 000 | 385 | 122 | 40 | - | - |
| H-E | 10 000 | 525 | 122 | 40 | - | - |
| E-J | 10 000 | 405 | 122 | 40 | 35 | 47 |

— FITTED WITH GREASE NIPPLES FOR LUBRICATION
TO ENSURE LONG LIFE AND EASE OF OPERATION —
— THESE SWIVELS ARE USED FOR ROTATION UNDER LOAD —