


ILULA®

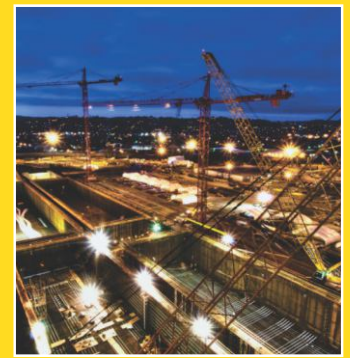

GRADE 80 CHAIN SLINGS

Chain slings are the classic and widely used handling attachment for a wide variety of lifting applications. They feature flexibility and extremely high durability. Generally to EN 818-4 and SANS 50818-4.

We offer complete chain slings and components as well as corresponding accessories and spare parts. Chain slings made to order according to your requirements.

All lifting components are uniformly marked with equivalent chain size and grade. Chain sling Working Load Limits and angles as per EN 818-4 and SANS 50818-4. Safety factor: 4:1

WORKING LOAD LIMITS							
	Two Leg		Three Leg		Four Leg		
Angle from vertical - β	0°	0-45° / 45-60°	0-45° / 45-60°	0-45° / 45-60°	0-45° / 45-60°	0-45° / 45-60°	
Angle between legs - α	-	0-90° / 90-120°	-	-	0-90° / 90-120°	90-120°	
Chain Diameter (mm)	t	t	t	t	t	t	
7	1.50	2.12 / 1.50	3.15 / 2.24	3.15 / 2.24	3.15 / 2.24	3.15 / 2.24	
8	2.00	2.80 / 2.00	4.25 / 3.00	4.25 / 3.00	4.25 / 3.00	4.25 / 3.00	
10	3.15	4.25 / 3.15	6.70 / 4.75	6.70 / 4.75	6.70 / 4.75	6.70 / 4.75	
13	5.30	7.50 / 5.30	11.20 / 8.00	11.20 / 8.00	11.20 / 8.00	11.20 / 8.00	
16	8.00	11.20 / 8.00	17.00 / 11.80	17.00 / 11.80	17.00 / 11.80	17.00 / 11.80	
20	12.50	17.00 / 12.50	26.50 / 19.00	26.50 / 19.00	26.50 / 19.00	26.50 / 19.00	
22	15.00	21.20 / 15.00	31.50 / 22.40	31.50 / 22.40	31.50 / 22.40	31.50 / 22.40	
Factor	1.0	1.4 / 1.0	2.1 / 1.5	2.1 / 1.5	2.1 / 1.5	2.1 / 1.5	

1 LEG SLING 2 LEG SLING



3 LEG SLING



4 LEG SLING

