




LOW HEADROOM WIRE ROPE HOIST

Premium and robust constructed hoists, with economical spares and lower lifetime costs



- Premium quality, well-constructed and robust wire rope hoists.
- Designed to FEM and European standards.
- Lower total cost of ownership with economical spare parts pricing.
- IP54 twin dual speed travelling motors with programmable VFD.
- Reliable IP55 dual speed high powered lifting motor.
- M5 Duty cycle.
- IP54 Control panel with Schneider contactors.
- Pendant control and load limiter included with hoist.
- Easy access to rope drum and rope guide for inspection and repair work.
- Control voltage 110V standard (option for 48V conversion).

Product Code	Capacity (T)	Duty	Rope Reeving	Lifting Speed (m/min)	Lifting Motor (kW)	Travelling Speed (m/min)	Travelling Motor (kW)
PWLH050/09M	5	M5	4/1	5/0,8	6,1/1,0	20/5	2X0,37+VFD
PWLH050/12M	5	M5	4/1	5/0,8	6,1/1,0	20/5	2X0,37+VFD
PWLH100/09M	10	M5	4/1	5/0,8	9,5/1,5	20/5	2X0,75+VFD
PWLH100/12M	10	M5	4/1	5/0,8	9,5/1,5	20/5	2X0,75+VFD

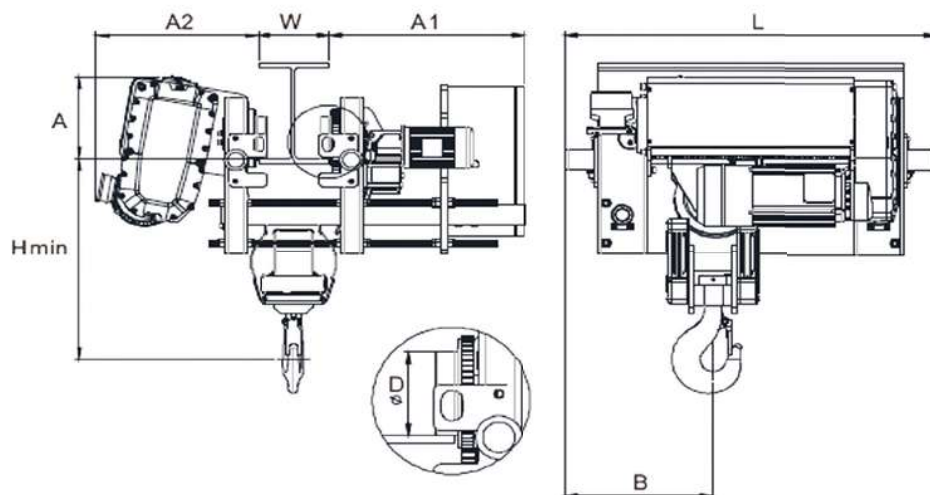

Product Code	Rail Width Range W (mm)		Wire rope Ø (mm)	Wheel Ø D (mm)	A (mm)	A1 (mm)	A2 (mm)	B (mm)
	I Beam	H Beam						
PWLH050/09M	110-180	110-460	9	125	249	565	489	392
PWLH050/12M	110-180	110-460	9	125	249	565	489	392
PWLH100/09M	120-180	120-460	13	150	336	556	556	454
PWLH100/12M	120-180	120-460	13	150	336	556	556	454